



Specifications:
 Frequency:
 VSWR Max:
 VSWR WOW/360 (max):

Insertion Loss (dB Max):
 Insertion Loss WOW/360 (dB max):
 Isolation (min dB):
 Peak Power:
 Average Power:

CONNECTOR, SMA JACK
 4 PLACES

Channel 1	Channel 2
DC-18 GHz	DC-4.0 GHz
1.95:1	1.7:1 DC-2.0 GHz
0.05	2.5:1 2.0-4.0 GHz
	.05 DC-2.0 GHz
	.20 2.0-4.0 GHz
	.50 DC-2.0 GHz
	1.80 2.0-4.0 GHz
	.10 DC-2.0 GHz
	.25 2.0-4.0 GHz
	50

HD17362 Dual Channel Rotary Joint

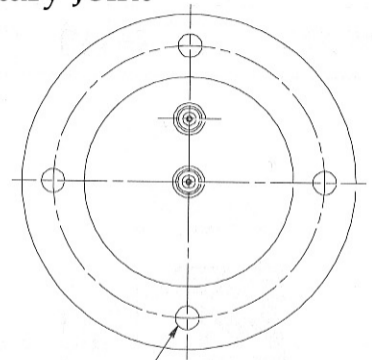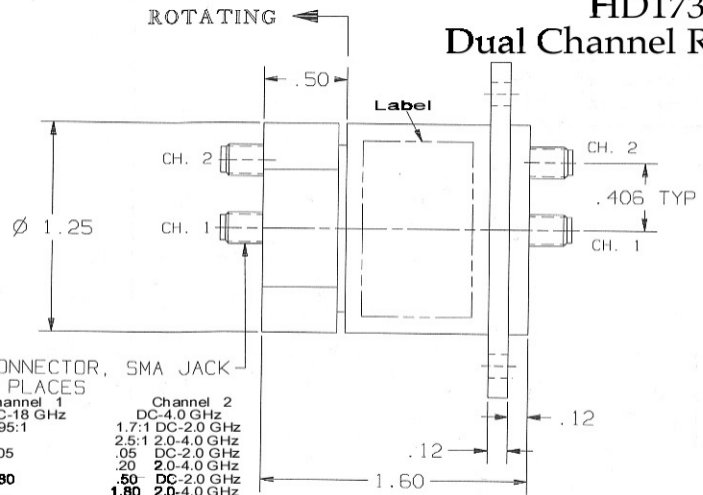

Ø .140 THRU, 4 HOLES
 EQ. SP., LOC. AS SHOWN
 ON A Ø1.625 B.C.

HD Communications Corp.
 1 Comac Loop
 Ronkoma, NY 11779
 (888) 588-3800 (631) 588-3877
 Fax: (631) 588-3879
 web: www.hdcom.com
 email: sales@hdcom.com