
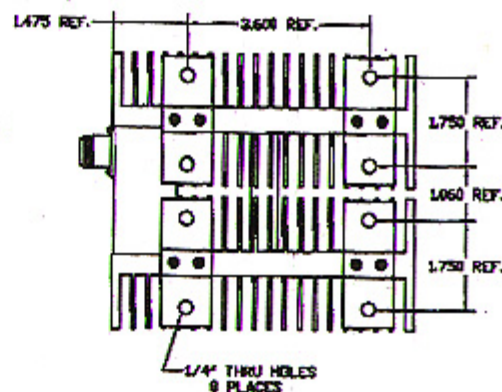
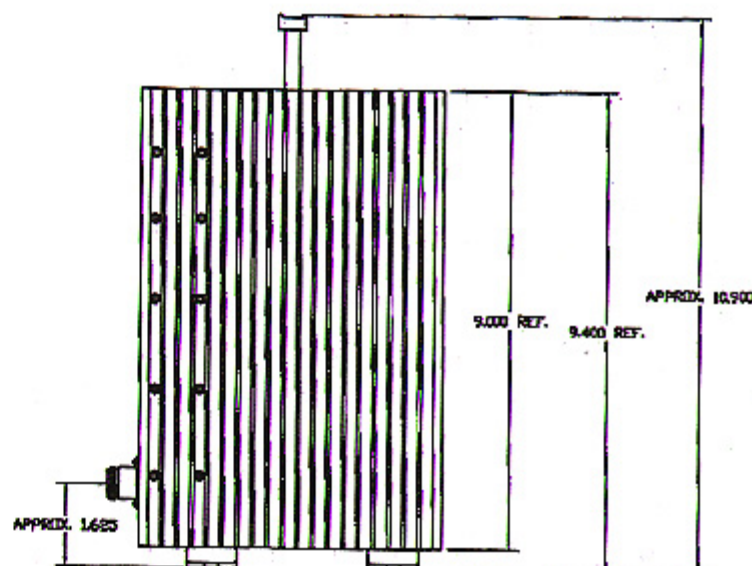
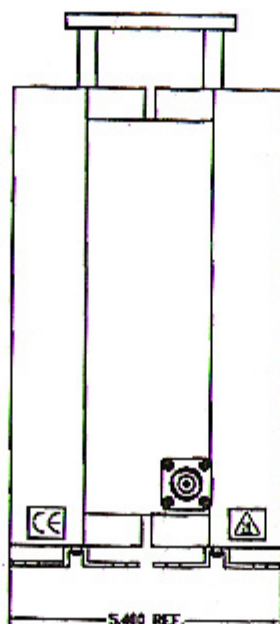


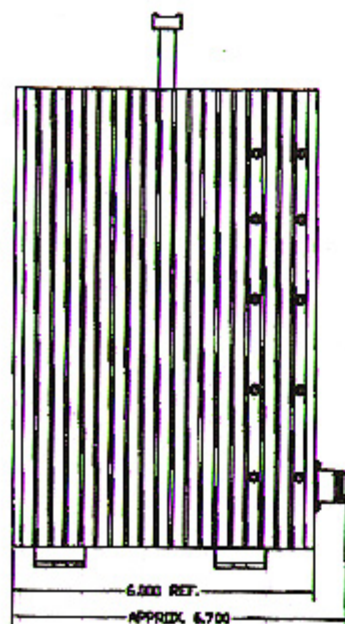

SPECIFICATIONS:

IMPEDANCE: 50 OHMS NOMINAL

POWER RATING: 300 WATTS AVERAGE AT +40°C AMBIENT

FREQUENCY RANGE: DC TO 3 GHz

VSWR: DC TO 1 GHz AT 1.10:1 MAX.

1 GHz TO 3 GHz AT 1.30:1 MAX.

OPERATING TEMPERATURE RANGE: -40°C TO +40°C

COOLING FIN: ALUMINUM, BLACK ANODIZED FINISH

HEAT SPREADER: ALUMINUM, TRI-ALLOY PLATED

CONNECTOR: FEMALE N-TYPE, TRI-ALLOY PLATED

DIMENSIONS: 10.9\"/>

WEIGHT: APPROX. 11.5 LBS.

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
X.XX = ± 0.015
X.XXX = ± 0.005 SCALE
DIM. ARE IN INCHESAPPROVED: *[Signature]*

DATE: 6-14-01

HD Communications Corp.

DESCRIPTION: 300 WATT CONVECTION COOLED TERMINATION, N-TYPE FEMALE

DWG. BY: CGE

DATE: 6-11-01

PART NUMBER: HDC-025-F-FN

REV.